




## BENCH CENTRIFUGE

### Specifications:

Maximum Speed 6,000 rpm  
Variable speed 1,000 to 6,000 rpm  
Maximum rcf 3,850 G  
Timer 0 to 30 minutes  
Digital control of parameters  
Automatic soft start  
Variable Brake  
Pulse control 1 to 90 Seconds (Quick spin)  
Memory, Last Run/Pre-set  
Bright LED display of speed and time  
Dimensions cm H24.5 x W28.5 x D35  
Weight 17Kg

**Made in England**

### Display (see below)

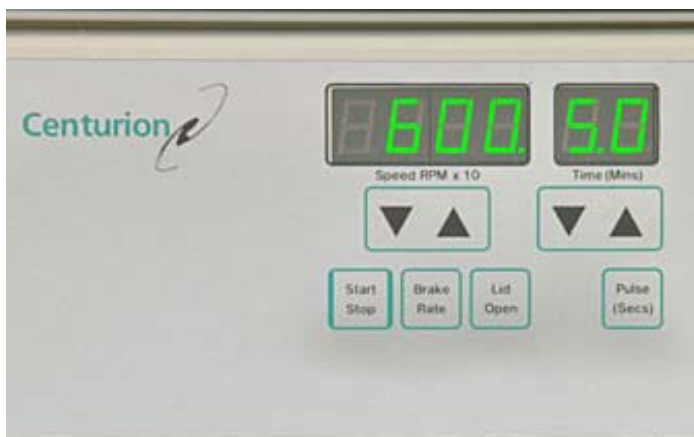

### Standard to ALL models:

Double Lid Locks  
Double Hinged Lid  
Barrier ring + Bowl  
Lid Sensor  
Imbalance Sensor  
Over speed & stop Sensor  
Tacho sensor  
Electronic watchdog circuit  
Service Diagnostics

### Rotors Available – 6,000 rpm Max

**5420** Fixed Angle 12 x 15 ml max.

**5408** Fixed Angle 8 x 15 ml max.

**ADAPTORS for above rotors:**

**8009** 5/10 ml (set of 4)



### Safety - Centurion centrifuges are CE marked

Manufactured from strong zinc coated steel.  
Finished with a tough plastic coating.  
Digital Electronics provide reliability & accuracy.  
Displays are bright LED's.  
Electric motors are of the finest quality.  
One Year Warranty

**NEW** Quick fit system is standard on all machines.  
Rotors have easy push fit/removal system.



**5434** Fixed angle 4 x 50 ml max.

**ADAPTORS for above rotor:**

**6006** 25 ml (set of 4)

**6007** 15 ml (set of 4)